




Perkins UK

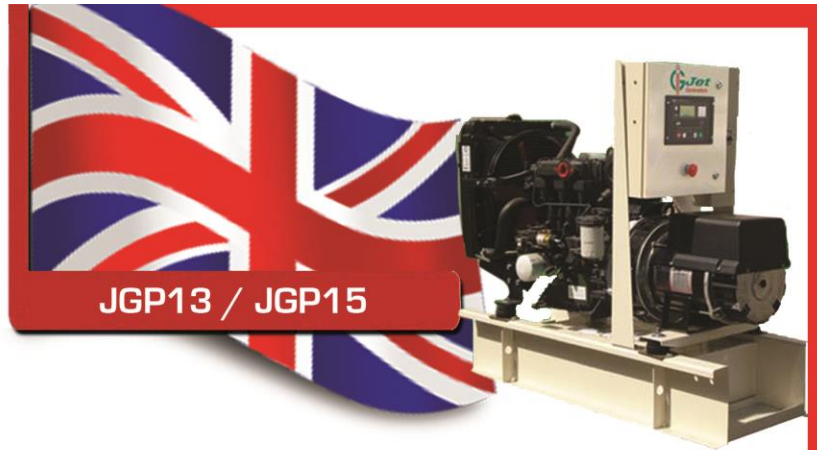

○ GENSET MODEL

	Prime	JGP13	
	Standby	JGP15	
Engine speed	rpm	1500	1800
Frequency	Hz	50	60
Prime Power	KVA	13	15
	KW	10.4	12
Standby Power	KVA	14.3	16.5
	KW	11.4	13.2
Gross Engine Power	KW	13.5	16.2
	hp	18	22

*Rating at 0.8 Power Factor

Fuel Consumption @ 50% load	L/hr	2.1	2.4
@ 75% load	L/hr	2.8	3.2
@ 100% load	L/hr	3.7	4.3

○ TECHNICAL DATA

Perkins Engine Model	403D- 15G		
Leroy Somer / Stamford Alternator Model	LSA37M7 / BCAI 164G		
Number of Cylinders	3 in line		
Cubic Capacity	Litres	1.5	
	cu.in	91.3	
Bore	mm	84	
	in	3.3	
Stroke	mm	90	
	in	3.5	
Fuel Tank Capacity	Lit	40	

○ DIMENSIONS & WEIGHT

Length	cm	125
Width	cm	52
Height	cm	117
Weight	Kg	400

Prime Rating: These ratings are applicable for supplying continuous electrical power in lieu of commercially purchased power. This model can supply 10% overload power for 1 hour in 12 hours.

Standby Rating: These ratings are applicable for supplying continuous electrical power in the event of utility power failure. No overload is permitted on these ratings.



Rua Pedro de Castro vandunen (Loy) entre a retunda de entrada do Nova Vida e a entrada do Gamek, Kilamba Kiayi

Fax: 222 383 187
Tel: 912 503 137
923 320 418
923 343 142

E-Mail: nabil06@hotmail.com
www.beledear.com